

VERSIONI

Albero passante M. 1"3/8 -
M. 1"3/8

VERSIONS

Through shaft M. 1"3/8 -
M. 1"3/8

VERSIONES

Eje pasante estriado M. 1"3/8 -
M. 1"3/8

VERSIONS

Arbre traversant cannelé mâle
1"3/8

AUSFÜHRUNGEN

Durchgehender Gelenkwellenstummel
1"3/8

Giri/1': max 550
Pressione: max 50 BAR
Portata: max 235 lt/1'
Peso: kg 54
Max. disl. asp.: mt 2


Max RPM: 550
Pressure: max 50 BAR
Capacity: max 235 lt/1'
Weight: kg 54
Max suction lift: mt 2

RPM max: 550
Presión: max 50 BAR
Caudal: max 235 lt/1'
Peso: kg 54
Max disn. asp.: mt 2

Tours/1' max: 550
Pression: max 50 BAR
Débit: max 235 lt/1'
Poids: kg 54
Max haut, asp.: mt 2

Umdr. pro Minute: max 550
Druck: max 50 BAR
Förderstrom: max 235 lt/1'
Gewicht: kg 54
Max Ansaughöhe: mt 2

USG LT/1'

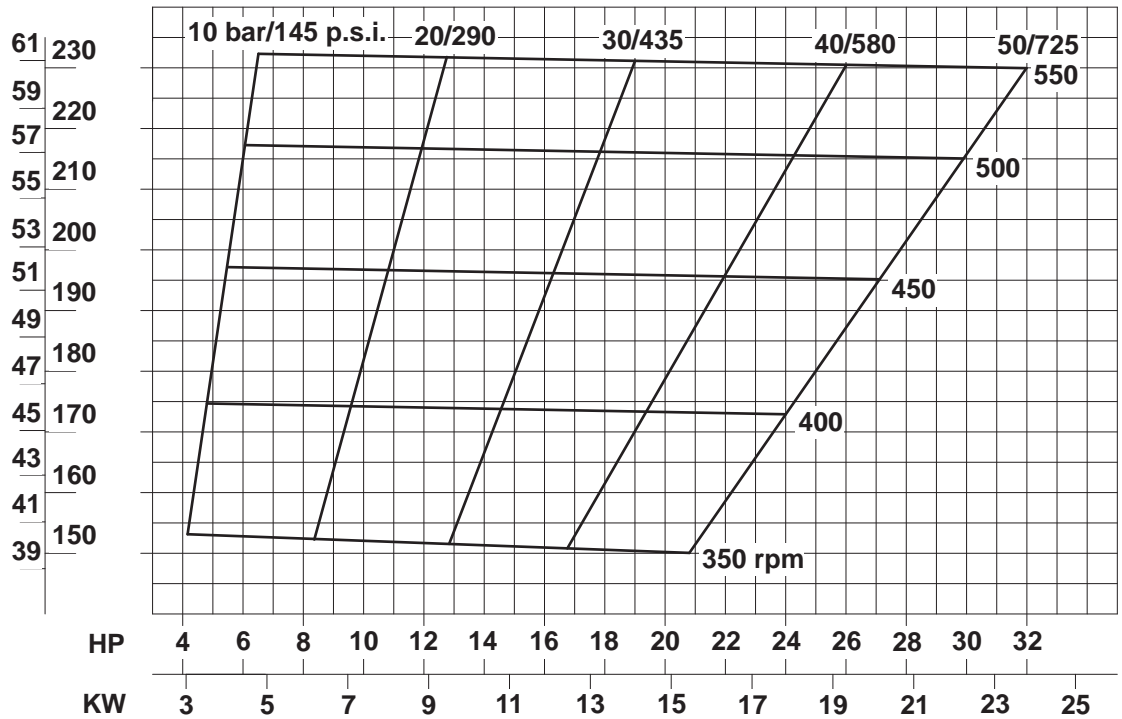

DATI INFORMATIVI

INDICATIVE DATA

DATOS INDICATIVOS

DONNÉES À TITRE D'INFORMATION

KENNDATEN UNVERBINDLICH



imovilli pompe S.r.l.

Via Masaccio, 1 Zona Industriale Mancasale - 42010 Reggio Emilia Italy Tel. +39 0522 516595 Fax +39 0522 514735
www.imovillipompe.it • e-mail: info@imovillipompe.it